


THE COMPLETE WATER COLLECTION SYSTEM OF **EAGLE PEAK CONTAINERS, INC.**

INSTALATION GUIDE

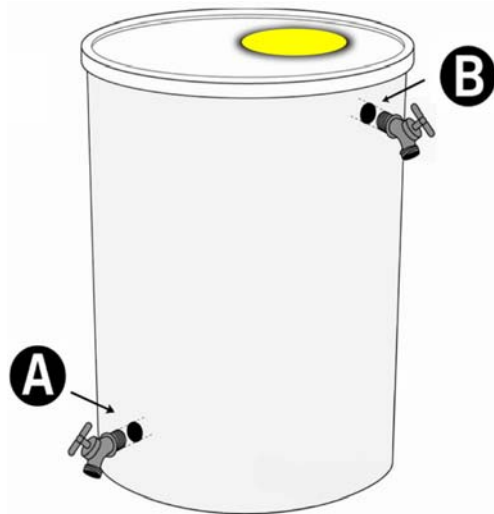


Basic Instruction

A four inch (4") hole has been cut in the top of the barrel and a nylon mesh bag screen has been cemented into place for the water inlet drain.

Step A: Insert the threaded hose bibb into the already drilled hole. Keep the hose bibb straight as you screw it into the barrel. Teflon tape has been wrapped around the bibb to ensure a tight, drip-free connection.


Step B: (OPTIONAL) Insert the second threaded hose bibb into the already drilled hole (upper top). Keep the hose bibb straight as you screw it into the barrel. Teflon tape has also been wrapped around this hose bibb to ensure a tight, drip-free connection.

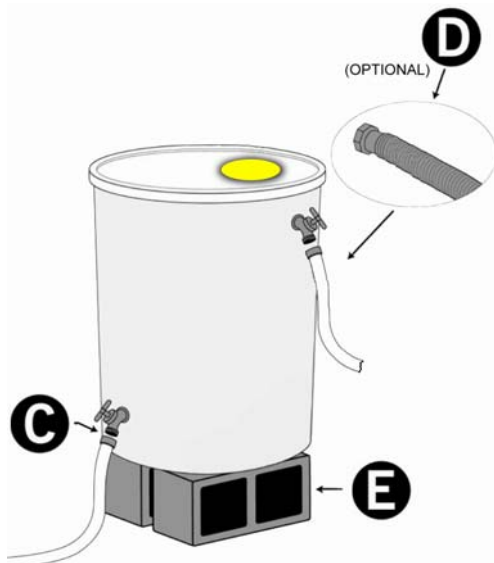

Step C: Attach a garden hose or soaker hose to the lower hose bibb.

Step D: (Optional – tandem barrel connection) Attach a ½' hose to the upper hose bibb (sump adapter hose bibb connector) and connect to a water storage container or other discharge drainage system (e.g. soaker hose or additional barrel)

Step E: Use cinderblocks or similar pavers to elevate the completed water rain barrel. This will elevate the barrel off the ground to add easier access to the lower hose bibb and to facilitate a positive gravity-fed drainage discharge.

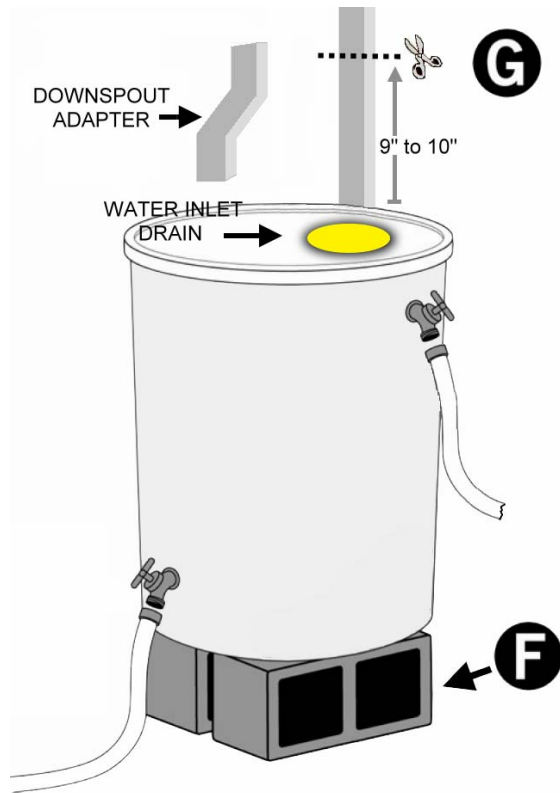


Positioning the down spot and gutter assembly adapter.

Step F: To attach the completed water rain barrel system to your house, find a convenient location that is level. Remember when a rain collector barrel is full, it can weigh over 400 pounds, so it is important to place it in a level location to keep the barrel stable. Place the water collection barrel on cinderblocks or similar pavers next to the house gutter.

Step G: Approximately nine to ten inches above the water collection barrel cut out the excess cutter section.

IMPORTANT: Before cutting the downspout, visually lineup the downspout adapter with the collection barrel to make certain the distance from the down spout and the collection barrel is correct. The distance can vary depending on the type of rain collection barrel and gutter assembly adapter ordered.

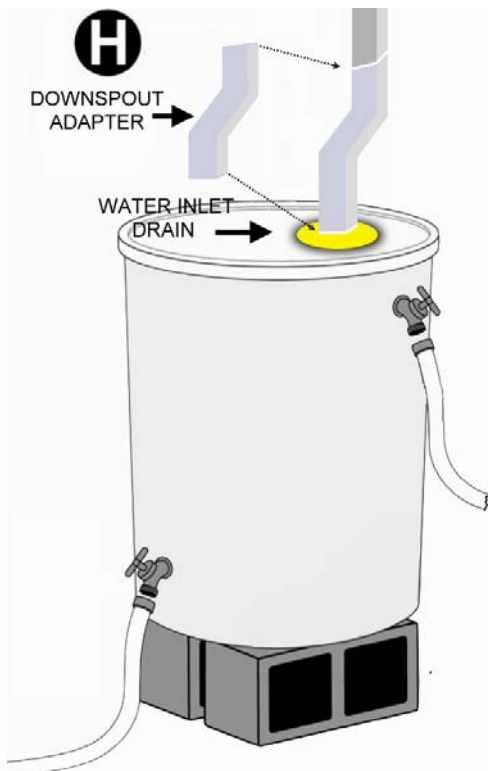

Step H: Attach the gutter adapter to your home gutter and align the water collection barrel water inlet drain with the end of the adapter. On most water collection barrel systems, positioning of the water inlet drain can be adjusted simply by turning the top lid to fit the downspout adapter position.

Note: Be sure to use or drain your rain barrel at regular intervals and before winter. Keep rain gutters clean of debris to prevent mosquito eggs and larvae from entering the barrel. Check hose bibb connections routinely and clean debris from the nylon mesh bag screen assembly. If you treat your roof for pests or wood, be sure to disconnect your rain collection system for at least two weeks,